

Order code	EAN	Packaging - SKU
GPACLLUSN002	4891199214998	Eco blister, 1 pc/SKU

Product

Category	LED Lamps
Series	SPECIAL LAMPSMAINS VOLTAGE- CAPSULE G9
Model	GPACLLUSN002
Description	GPLUSN2335F-2U1, CAPULE MV G9 2.2-28W

General description

Energy label	F
Lamp shape	Cylinder
Lamp base	G9
Dimmable	No
Mercury free	Yes
Mercury content	0.0 mg
Recycling	Yes

Electrical characteristics

Nominal wattage	2.2W
Rated wattage	2.2W
Equivalent incandescent lamp power	28W
Power factor	0.5
Voltage	220-240V
Operating frequency	50/60Hz
Lamp current	20mA
Weighted Energy Consumption	2kWh/1000h

Light technical characteristics

Light colour	WARM WHITE
Colour temperature	2700K±150K
Colour rendering index (Ra)	>80
Colour consistency	<6
Nominal luminous flux	250LM
Rated luminous flux	250LM
Lumen maintenance factor at end of life	70%
Nominal beam angle	N/A
Rated beam angle	360°
Warm-up time (60%)	≤1.0s
Starting time	<0.2s

Lifespan

Nominal life time	25000hrs
Rated lamp life time	25000hrs
Switching cycles	12500


Product dimensions

Overall length (L)	52mm
Diameter (D)	15mm


Product Compliance	CE, ERP, ROHS, REACH
--------------------	----------------------

Warranty	12 months from ex-factory date
----------	--------------------------------

* Please refer to website www.gp-lighting.com for the list of compatible dimmers.



Spectral Distribution

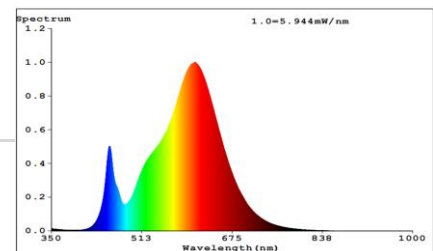

GP LED Lamps are designed for true direct replacement of standard

incandescent lamps.

- Compatible shapes and sizes of GLS
- Very low energy consumption
- Extremely long life
- Emit a warm white or cold white light for different ambience
- Instant start with full light output
- Available in most common lamp bases for household use
- No UV

Applications

- Domestic and commercial applications
- General illumination
- Can be used everywhere at home
- Use outdoors only in enclosed and ventilated luminaires